

OUTDOOR

LANDSCAPE TOTEM

ST-monitor-totem in landscape format for outdoor applications

Wherever information needs to be displayed individually adjustable and focused on a particular target group, monitor displays are the optimal medium

of communication. Individual sales messages as well as text or picture information can be transmitted flexibly and rendered visible immediately.

The landscape format is especially suited to convey customer information via video clips. Touch screen functionality is optionally available.



MODEL	46 L 111	55 L 111	65 L 111	75 L 111	85 L 111
panel	46 inch LCD	55 inch LCD	65 inch LCD	75 inch LCD	85 inch LCD
resolution	1920 × 1080 pixel	1920 × 1080 pixel	1920 × 1080 pixel	3840 × 2160 pixel	3840 × 2160 pixel
visible size of monitor W×H	1018 × 573 mm	1210 × 681 mm	1433 × 808 mm	1652 × 930 mm	1876 × 1057 mm
brightness	2500 nit	2500 3500 5500 7000 nit	2500 nit	3000 nit	4000 nit
temperature range	-33 bis +40 °C	-33 bis +40 °C	-33 bis +40 °C	-33 bis +40 °C	-33 bis +50 °C
temperature control	cooling and heating system	cooling and heating system	cooling and heating system	cooling and heating system	cooling and heating system
glass with UV+IR protection	VSG 9,14 mm - anti-glare	VSG 9,14 mm - anti-glare	VSG 9,14 mm - anti-glare	VSG 9,14 mm - anti-glare	VSG 9,14 mm - Optiwhite
dimensions W×H×D	1198 × 1926 × 205 mm	1390 × 1980 × 205 mm	1613 × 2044 × 220 mm	1852 × 2115 × 220 mm	2076 × 2178 × 220 mm

All models are also available in a double-sided variation (Depth D = 298 mm)



Highest quality in every detail

The use of high-quality components guarantees a maximum service life and unmatched longevity. Our systems operate flawless under difficult weather or environmental conditions – 24 hours a day. This is proven by numerous installations in demanding locations, such as altitudes above 2000 meters in the Alps or on the first coastline on the North and Baltic coasts.

A revision-friendly design of all systems ensures that every single component is accessible and can be serviced regularly with little effort. Stable doors in the base area, hinged front elements and swiveling monitor suspensions inside allow quick access even in the smallest spaces. If indeed one component fails, it can be replaced with a new component in no time.

The entire frame construction is designed for maximum security. All statically relevant components made of steel or aluminum are manufactured in compliance with the requirements of DIN EN 1090 and guarantee great stability for all possible load cases. Glazing with laminated safety glass (VSG) reduces the risk of damage to people if the glass breaks. Security locks and all-round gear locks lock the housing safely and protect against vandalism and unauthorized access.

Optional Extensions



TOUCH-SCREEN



FREE CHOICE OF COLOURS



BRIGHTNESS CONTROL



CAMERA (USB / IP)



WLAN MODULE



MICROPHONE



3G/4G/5G MODULE



SPEAKER



NEARFIELD-COMMUNICATION



DEFIBRILLATOR



ANTI-GRAFFITI



ANTI-FINGERPRINT

A brilliant, detailed picture with monitors from 46 to 85 inches in Full-HD or 4K resolution.


Readable in direct sunlight thanks to brightness up to 7000 nits and anti-glare glass with UV and IR protection.

Ceramic passepartout print on the inside of the front.

Intuitively operated touch elements via an optional 40-point multi-touch surface.

Openable glass casement frames for revision work, either as folding or rotating sash, dependent of the model.

Locked base area as storage space for all electronic components, control devices and connections.

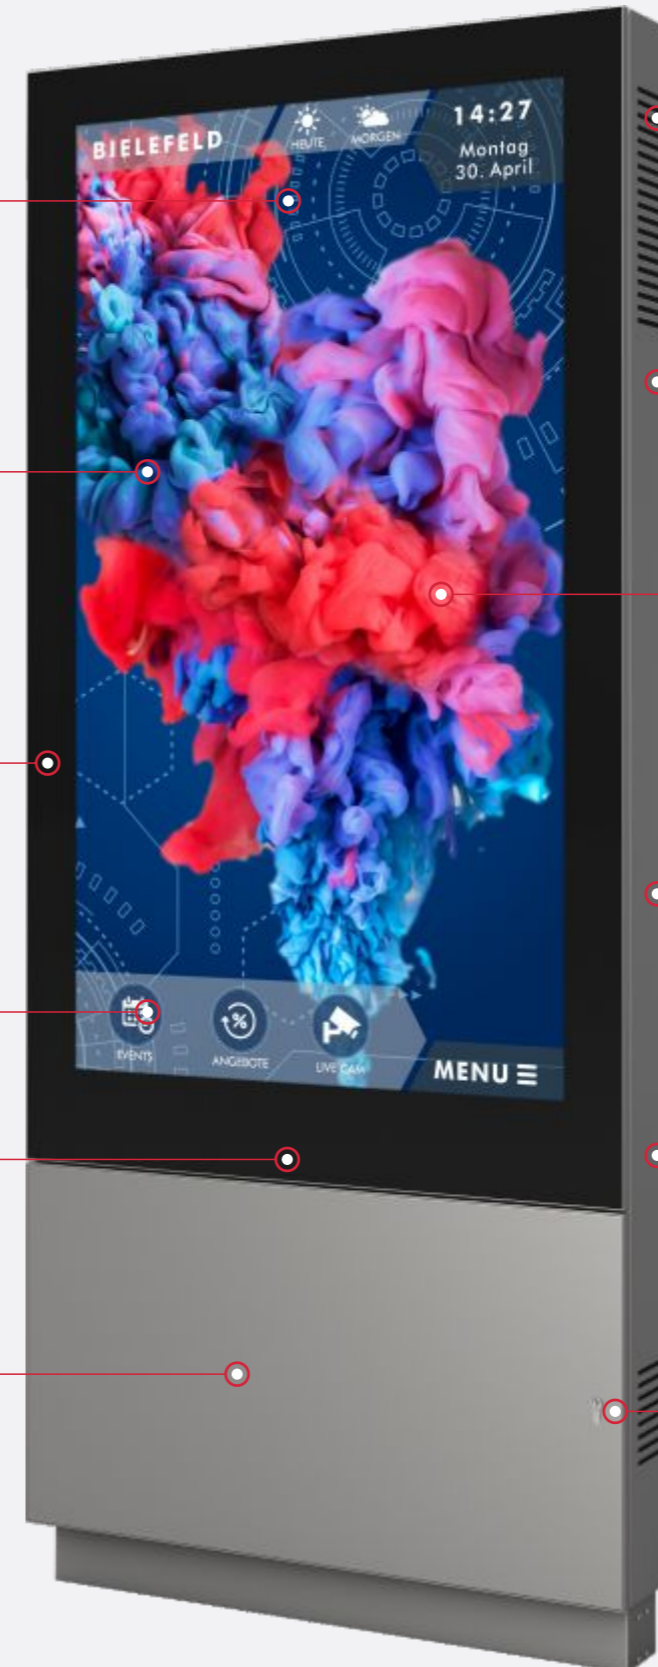

Reliable 24/7 operation in the temperature range from -33 ° to + 40 ° C thanks to powerful air-cooling systems and integrated heating elements.

Aluminum housing in all RAL, special and anodized colors available.

Splinter-binding laminated safety glass (VSG) in the front with a thickness of 9.14 mm.

Housing construction with certified shock resistance - 2xIK 10.

All statically relevant aluminum and steel components are made according to the specifications of DIN EN 1090.

Socket door with a flush built-in security lock with a profile cylinder, optionally positioned on the narrow side.